

# WonderWall™ Installation

The WonderWall™ is a robust Barrier system comprising of a hollow barrier fence, and a heavy duty base. A top panel can be inserted to create additional height when required.

## Basic Installation:



**1]** Installation of the Barrier unit is from right to left. Place the Base down at the far right position of the area of installation, then place the Fence panel into the top of the Base pushing down.



**2]** For each adjoining Barrier, insert the Fence panel at an angle so that the Peg slots into the corresponding hole, and the Fence locates into its Base.




**3]** Continue installation of each set going from right to left up until the end of the site works.

NB. It does not matter which way round the Base is placed.

## Top Panel Installation:



**1]** Starting from the Left, align each DoubleTop leg with the open holes, and push the Panel down into the Barrier.

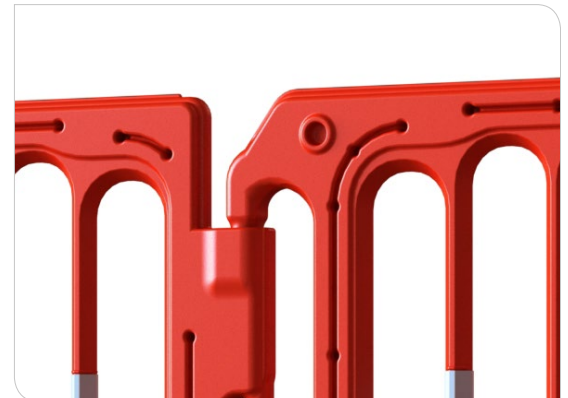

**2]** Ensure the Hook at the top locates into the adjoining DoubleTop. No Coupler is required.

NB. 'Front' denotes the orientation of the DoubleTop.



# WonderWall™ Installation

When the WonderWall™ is used with the DoubleTop, it is recommended that the below should be taken into consideration:

## Continuous Runs:



When the WonderWall™ is positioned as a continuous run for more than 4 Barriers, with the DoubleTop, it is recommended to add an additional WonderWall perpendicular to every 4th Barrier.

This addition in Barrier will create a solid structure that will be near to impossible to get through.



The information given on these sheets is typical of the product depicted it must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice. All measurements are in millimetres (mm)